


CATENA A RULLI - ISO 9001

ROLLER CHAINS - ISO 9001

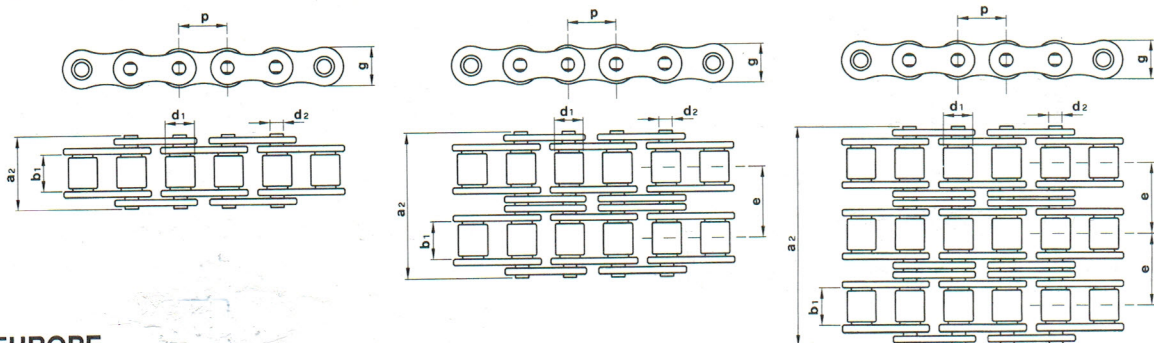

MADE IN EUROPE

CATENA A RULLI SEMPLICE - DIN 8187

ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	F _B min N	q kg/m ≈
	mm	inch							
04-1	6	-	2,80	1,85	4,00	7,4	5,00	3.000	0,12
05B-1	8	-	3,00	2,31	5,00	8,6	7,11	4.600	0,18
06B-1 ▲	9,525	3/8"	5,72	3,28	6,35	13,5	8,26	9.100	0,41
081-1 ▲	12,7	1/2"	3,30	3,66	7,75	10,2	9,91	8.200	0,28
083-1 ▲	12,7	1/2"	4,88	4,09	7,75	12,9	10,30	12.000	0,44
084-1	12,7	1/2"	4,88	4,09	7,75	14,8	11,15	16.000	0,49
08B-1 ▲	12,7	1/2"	7,75	4,45	8,51	17,0	11,81	18.200	0,70
10B-1 ▲	15,875	5/8"	9,65	5,08	10,16	19,6	14,73	22.700	0,95
12B-1	19,05	3/4"	11,68	5,72	12,07	22,7	16,13	29.500	1,25
16B-1	25,4	1"	17,02	8,28	15,88	36,1	21,08	58.000	2,70
20B-1	31,75	1 1/4"	19,56	10,19	19,05	43,2	26,42	95.000	3,60
24B-1	38,1	1 1/2"	25,40	14,63	25,40	53,4	33,40	170.000	6,70
28B-1	44,45	1 3/4"	30,99	15,90	27,94	65,1	37,08	200.000	8,30
32B-1	50,8	2"	30,99	17,81	29,21	67,4	42,29	260.000	10,5
40B-1	63,5	2 1/2"	38,10	22,89	39,37	82,6	52,90	355.000	16,99

CATENA A RULLI DOPPIA - DIN 8187


ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	F _B min. N	q kg/m ≈
	mm	inch								
06B-2	9,525	3/8"	5,72	3,28	6,35	23,8	8,26	10,24	17.300	0,78
08B-2	12,7	1/2"	7,75	4,45	8,51	31,0	11,81	13,92	31.800	1,35
10B-2	15,875	5/8"	9,65	5,08	10,16	36,2	14,73	16,59	45.400	1,85
12B-2	19,05	3/4"	11,68	5,72	12,07	42,2	16,13	19,46	59.000	2,50
16B-2	25,4	1"	17,02	8,28	15,88	68,0	21,08	31,88	110.000	5,40
20B-2	31,75	1 1/4"	19,56	10,19	19,05	79,7	26,42	36,45	180.000	7,20
24B-2	38,1	1 1/2"	25,40	14,63	25,40	101,8	33,40	48,36	324.000	13,50
28B-2	44,45	1 3/4"	30,99	15,90	27,94	124,7	37,08	59,56	381.000	16,60
32B-2	50,8	2"	30,99	17,81	29,21	126,0	42,99	58,55	495.000	21,00
40B-2	63,5	2 1/2"	38,10	22,89	39,37	154,0	52,90	72,29	630.000	33,61

CATENA A RULLI TRIPLA - DIN 8187

ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	F _B min. N	q kg/m ≈
	mm	inch								
06B-3	9,525	3/8"	5,72	3,28	6,35	34,0	8,26	10,24	25.400	1,2
08B-3	12,7	1/2"	7,75	4,45	8,51	44,9	11,81	13,92	45.400	2,0
10B-3	15,875	5/8"	9,65	5,08	10,16	52,8	14,73	16,59	68.100	2,8
12B-3	19,05	3/4"	11,68	5,72	12,07	61,7	16,13	19,46	88.500	3,8
16B-3	25,4	1"	17,02	8,28	15,88	99,9	21,08	31,88	165.000	8,0
20B-3	31,75	1 1/4"	19,56	10,19	19,05	116,1	26,42	36,45	270.000	11,0
24B-3	38,1	1 1/2"	25,40	14,63	25,40	150,2	33,40	48,36	485.000	21,0
28B-3	44,45	1 3/4"	30,99	15,90	27,94	184,3	37,08	59,56	571.000	25,0
32B-3	50,8	2"	30,99	17,81	29,21	184,5	42,99	58,55	743.000	32,0
40B-3	63,5	2 1/2"	38,10	22,89	39,37	229,0	52,90	72,29	907.000	48,0

CATENA A RULLI CON PIASTRE A PROFILO DIRITTO - ISO 9001

ROLLER CHAINS WITH STRAIGHT PLATES - ISO 9001

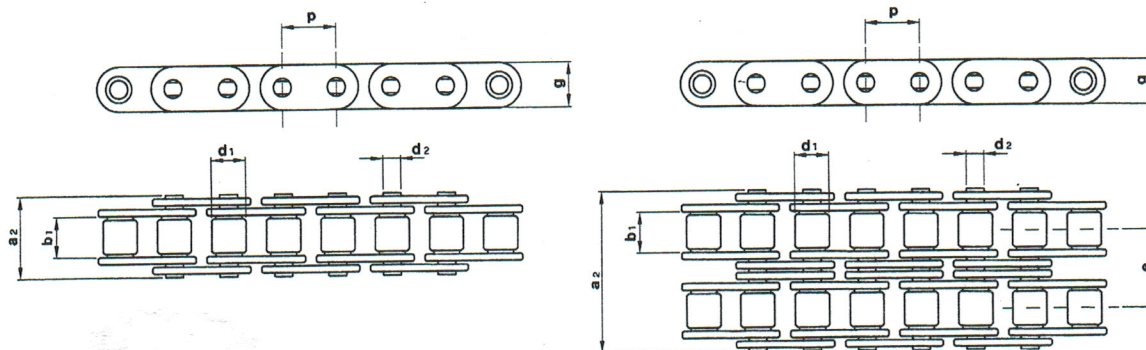

MADE IN EUROPE

CATENA A RULLI SEMPLICI - DIN 8187


ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	F _B min. N	q kg/m ≈
	mm	inch							
08B-1	12,7	1/2"	7,75	4,45	8,51	17	11,5	18.900	0,78
10B-1	15,875	5/8"	9,65	5,08	10,16	19,6	13,9	22.700	1,03
12B-1	19,05	3/4"	11,68	5,72	12,07	22,7	16,1	29.500	1,30
16B-1	25,4	1"	17,02	8,28	15,88	36,1	21	58.000	2,90
20B-1	31,75	1" 1/4	19,56	10,19	19,05	43,2	26,2	95.000	4,15

CATENA A RULLI DOPPI - DIN 8187


ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	F _B min. N	q kg/m ≈
	mm	inch								
10B-2	15,875	5/8"	9,65	5,08	10,16	36,2	13,9	16,59	45.400	1,95
12B-2	19,05	3/4"	11,68	5,72	12,07	42,2	16,1	19,46	59.000	2,60
16B-2	25,4	1"	17,02	8,28	15,88	68,0	21,0	31,88	110.000	5,70
20B-2	31,75	1" 1/4	19,56	10,19	19,05	79,7	26,2	35,45	180.000	7,80

CATENA A RULLI A PERNI FORATI - ISO 9001

ROLLER CHAINS WITH HOLLOW PINS - ISO 9001

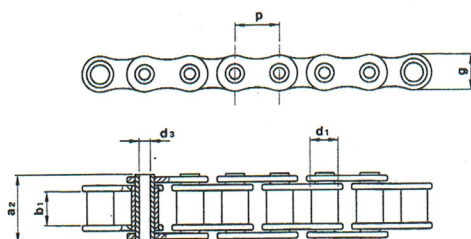

TIPO A

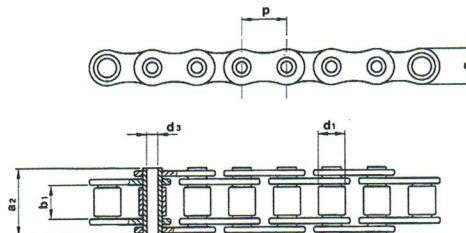


TIPO B

MADE IN EUROPE

ISO Nr.	p		b ₁ mm min.	d ₃ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	F _B min. N	q kg/m ≈	TIPO
	mm	inch								
08B-1	12,7	1/2"	7,75	4,50	8,51	17,0	11,6	9.400	0,59	A
10B-1	15,875	5/8"	9,65	5,13	10,16	19,6	14,5	12.800	0,73	A
12B-1	19,05	3/4"	11,68	5,85	12,07	22,7	15,9	12.800	0,90	A
08B-1	12,7	1/2"	7,75	4,50	8,51	17,0	11,6	10.800	0,59	B
10B-1	15,875	5/8"	9,65	5,13	10,16	19,5	14,5	14.700	0,77	B
12B-1	19,05	3/4"	11,68	5,85	12,07	22,7	15,9	16.700	1,02	B
12A-1	19,05	3/4"	12,70	5,97	11,91	25,0	18,0	25.000	1,30	B
16B-1	25,4	1"	17,02	8,33	15,88	36,1	21,0	32.800	2,25	B

CATENA A RULLI - ISO 9001

ROLLER CHAINS - ISO 9001

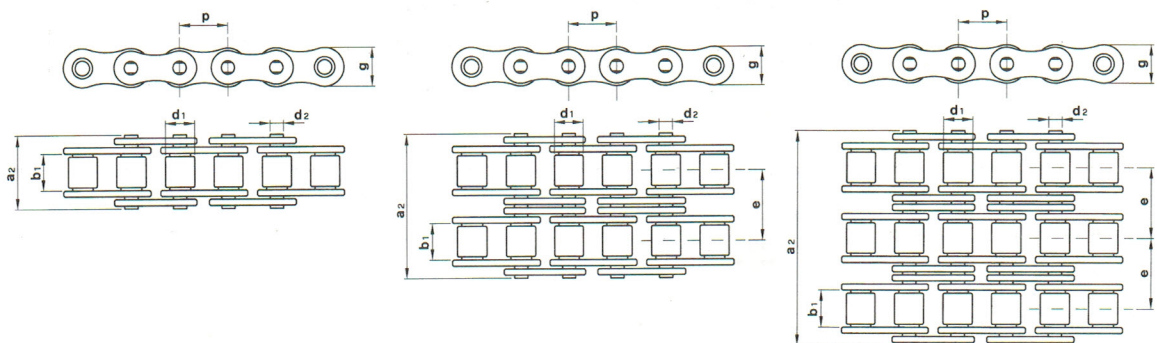

CATENA A RULLI SEMPLICE - DIN 8188 "ANSI" ASA

ANSI Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	F _B min N	q kg/m ≈
	mm	inch							
35-1	9,525	3/8"	4,77	3,58	5,08	13,2	9,05	8.000	0,31
40-1	12,7	1/2"	7,95	3,96	7,92	17,8	12,07	13.790	0,61
50-1	15,875	5/8"	9,53	5,08	10,16	21,8	15,09	21.800	1,01
60-1	19,05	3/4"	12,70	5,94	11,91	26,9	18,08	31.140	1,58
80-1	25,4	1"	15,88	7,92	15,88	33,5	24,13	55.600	2,36
100-1	31,75	1 1/4"	19,05	9,53	19,05	41,1	30,18	86.740	3,80
120-1	38,1	1 1/2"	25,40	11,10	22,23	50,8	36,20	125.000	5,40
140-1	44,45	1 3/4"	25,40	12,70	25,40	54,9	42,24	170.400	7,30
160-1	50,8	2"	31,75	14,27	28,58	65,5	48,26	222.400	9,90

CATENA A RULLI DOPPIA - DIN 8188 "ANSI" ASA


ANSI Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	F _B min N	q kg/m ≈
	mm	inch								
35-2	9,525	3/8"	4,77	3,58	5,08	21,6	9,05	10,13	16.000	0,67
40-2	12,7	1/2"	7,95	3,96	7,92	32,3	12,07	14,38	27.580	1,19
50-2	15,875	5/8"	9,53	5,08	10,16	39,9	15,09	18,11	43.600	1,70
60-2	19,05	3/4"	12,70	5,94	11,91	49,8	18,08	22,78	62.280	3,14
80-2	25,4	1"	15,88	7,92	15,88	62,7	24,13	29,29	111.200	4,90
100-2	31,75	1 1/4"	19,05	9,53	19,05	77,0	30,18	35,76	173.480	7,60
120-2	38,1	1 1/2"	25,40	11,10	22,23	96,3	36,20	45,44	250.000	10,80
140-2	44,45	1 3/4"	25,40	12,70	25,40	103,6	42,24	48,87	340.800	14,30
160-2	50,8	2"	31,75	14,27	28,58	124,2	48,26	58,55	444.800	19,40

CATENA A RULLI TRIPLA - DIN 8188 "ANSI" ASA

ANSI Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	F _B min N	q kg/m ≈
	mm	inch								
35-3	9,525	3/8"	4,77	3,58	5,08	31,8	9,05	10,13	24.000	1,01
40-3	12,7	1/2"	7,95	3,96	7,92	46,7	12,07	14,38	41.370	1,78
50-3	15,875	5/8"	9,53	5,08	10,16	57,9	15,09	18,11	65.400	3,08
60-3	19,05	3/4"	12,70	5,94	11,91	72,6	18,08	22,78	93.420	4,70
80-3	25,4	1"	15,88	7,92	15,88	91,7	24,13	29,29	166.800	7,50
100-3	31,75	1 1/4"	19,05	9,53	19,05	113,0	30,18	35,76	260.220	11,20
120-3	38,1	1 1/2"	25,40	11,10	22,23	141,7	36,20	45,44	375.000	16,10
140-3	44,45	1 3/4"	25,40	12,70	25,40	152,4	42,24	48,87	511.200	21,40
160-3	50,8	2"	31,75	14,27	28,58	162,9	48,26	58,55	667.200	28,90


CATENA A RULLI CON ATTACCHI ANGOLARI - DIN 8187 - ISO 9001
ROLLER CHAIN WITH ANGLE ATTACHMENTS - DIN 8187 - ISO 9001

A1/02

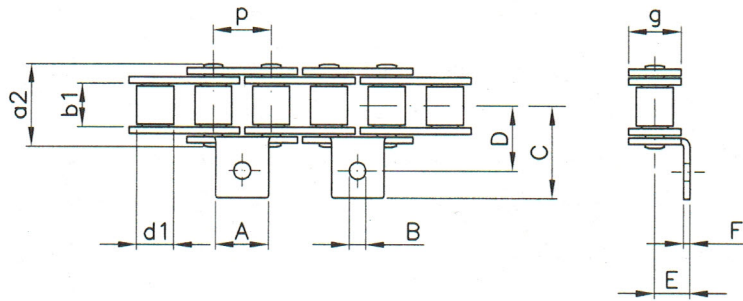


ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	E mm	F mm	F _a min. N	q kg/m ≈
	mm	inch												
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	8,0	3,5	13,5	9,5	6,5	1,03	9100	0,46
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	9,5	4,3	18,6	14,1	8,4	1,40	18200	0,77
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	14,1	5,2	23,8	15,9	10,4	1,63	22700	1,04
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	15,8	5,6	25,8	17,5	12,0	1,80	29500	1,35
16B-1	25,4	1"	17,02	15,88	36,1	21,08	19,0	6,8	37,4	25,4	15,9	3,00	58000	3,09

K1/02

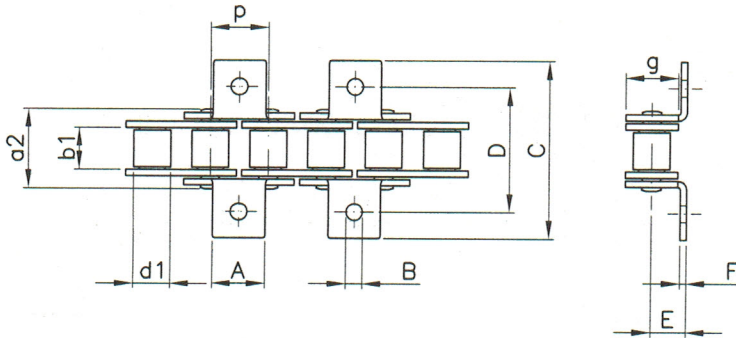

ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	E mm	F mm	F _a min. N	q kg/m ≈
	mm	inch												
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	8,0	3,5	27,0	19,0	6,5	1,03	9100	0,51
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	9,5	4,3	37,2	28,2	8,4	1,40	18200	0,85
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	14,1	5,2	47,6	31,8	10,4	1,63	22700	1,13
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	15,8	5,6	51,6	35,0	12,0	1,80	29500	1,45
16B-1	25,4	1"	17,02	15,88	36,1	21,08	19,0	6,8	74,8	50,8	15,9	3,00	58000	3,48

A1/01

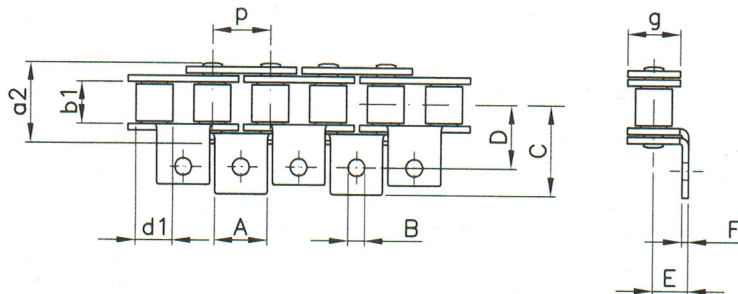


ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	E mm	F mm	F _a min. N	q kg/m ≈
	mm	inch												
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	8,0	3,5	13,5	9,5	6,5	1,03	9100	0,51
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	9,5	4,3	18,6	14,1	8,4	1,40	18200	0,85
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	14,1	5,2	23,8	15,9	10,4	1,63	22700	1,13
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	15,8	5,6	25,8	17,5	12,0	1,80	29500	1,45
16B-1	25,4	1"	17,02	15,88	36,1	21,08	19,0	6,8	37,4	25,4	15,9	3,00	58000	3,48

CATENA A RULLI CON ATTACCHI ANGOLARI - DIN 8187 - ISO 9001


ROLLER CHAIN WITH ANGLE ATTACHMENTS - DIN 8187 - ISO 9001

K1/01

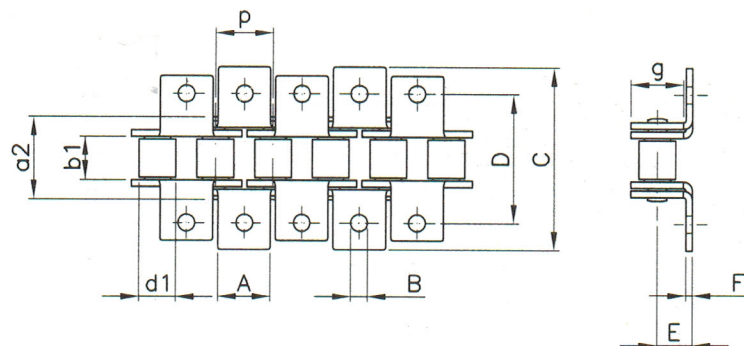


ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	E mm	F mm	F _B min. N	q kg/m ≈
	mm	inch												
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	8,0	3,5	27,0	19,0	6,5	1,03	9100	0,61
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	9,5	4,3	37,2	28,2	8,4	1,40	18200	1,01
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	14,1	5,2	47,6	31,8	10,4	1,63	22700	1,32
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	15,8	5,6	51,6	35,0	12,0	1,80	29500	1,66
16B-1	25,4	1"	17,02	15,88	36,1	21,08	19,0	6,8	74,8	50,8	15,9	3,00	58000	4,27

A2/02

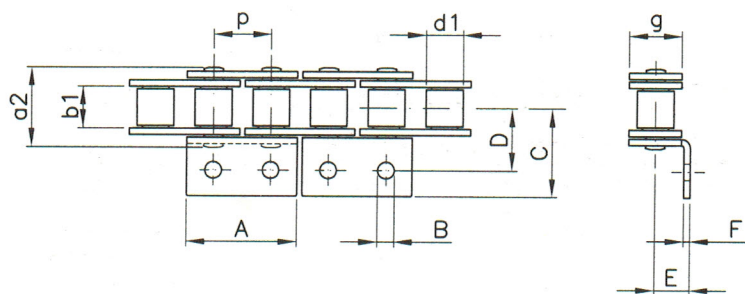

ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	E mm	F mm	F _B min. N	q kg/m ≈
	mm	inch												
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	17,6	3,5	13,5	9,5	6,5	1,03	9100	0,51
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	23,2	4,3	18,6	14,1	8,4	1,40	18200	0,85
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	29,3	5,2	23,8	15,9	10,4	1,63	22700	1,13
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	33,0	5,6	30,5	17,5	12,0	1,80	29500	1,45
16B-1	25,4	1"	17,02	15,88	36,1	21,08	46,0	6,8	39,1	25,4	15,9	3,00	58000	3,48


K2/02

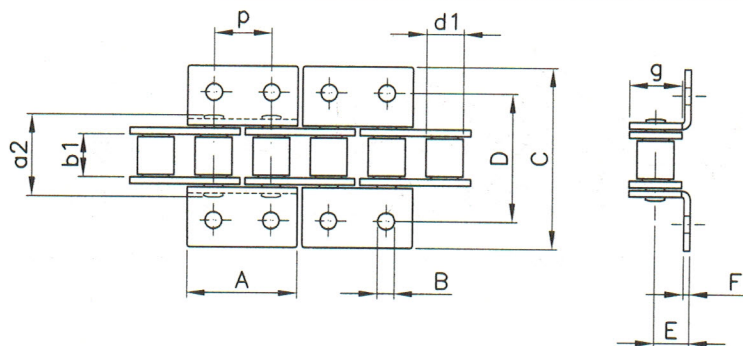

ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	E mm	F mm	F _B min. N	q kg/m ≈
	mm	inch												
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	17,6	3,5	27,0	19	6,5	1,03	9100	0,61
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	23,2	4,3	37,2	28,2	8,4	1,40	18200	1,01
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	29,3	5,2	47,6	31,8	10,4	1,63	22700	1,32
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	33,0	5,6	61,0	35,0	12,0	1,80	29500	1,66


CATENA A RULLI CON ATTACCHI VERTICALI - DIN 8187 - ISO 9001
ROLLER CHAIN WITH VERTICAL ATTACHMENTS - DIN 8187 - ISO 9001

M1/02

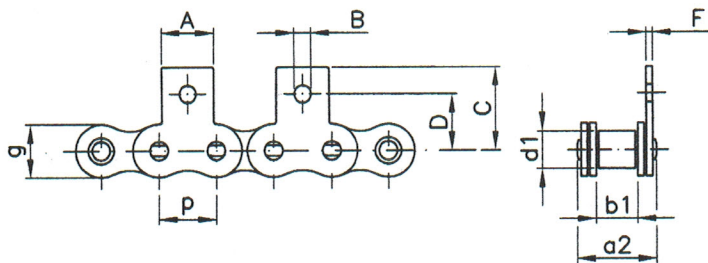


ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	F mm	F _s min. N	q kg/m ≈
	mm	inch											
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	8,0	3,5	13,5	9,5	1,03	9100	0,46
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	9,5	4,3	18,4	14,1	1,40	18200	0,77
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	14,1	5,2	24,7	15,9	1,63	22700	1,04
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	15,8	5,6	26,6	17,9	1,80	29500	1,35
16B-1	25,4	1"	17,02	15,88	36,1	21,08	19,0	6,8	35,0	26,0	3,00	58000	3,09

MK1/02

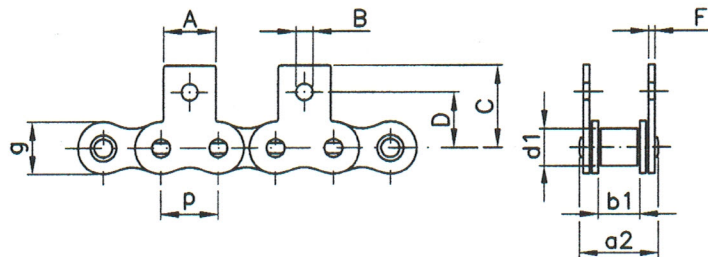

ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	F mm	F _s min. N	q kg/m ≈
	mm	inch											
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	8,0	3,5	13,5	9,5	1,03	9100	0,51
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	9,5	4,3	18,4	14,1	1,40	18200	0,85
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	14,1	5,2	24,7	15,9	1,63	22700	1,13
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	15,8	5,6	26,6	17,9	1,80	29500	1,45
16B-1	25,4	1"	17,02	15,88	36,1	21,08	19,0	6,8	35,0	26,0	3,00	58000	3,48


M1/01

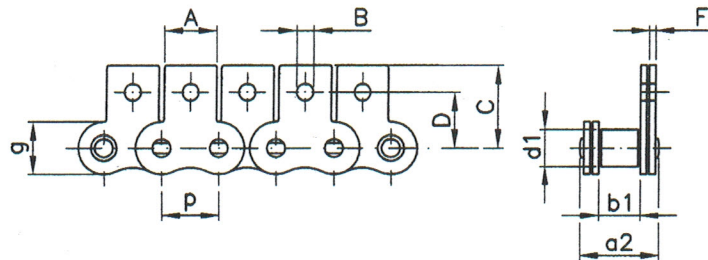

ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	F mm	F _s min. N	q kg/m ≈
	mm	inch											
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	8,0	3,5	13,5	9,5	1,03	9100	0,51
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	9,5	4,3	18,4	14,1	1,40	18200	0,85
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	14,1	5,2	24,7	15,9	1,63	22700	1,13
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	15,8	5,6	26,6	17,9	1,80	29500	1,45
16B-1	25,4	1"	17,02	15,88	36,1	21,08	19,0	6,8	35,0	26,0	3,00	58000	3,48


CATENA A RULLI CON ATTACCHI VERTICALI - DIN 8187 - ISO 9001
ROLLER CHAIN WITH VERTICAL ATTACHMENTS - DIN 8187 - ISO 9001

MK1/01

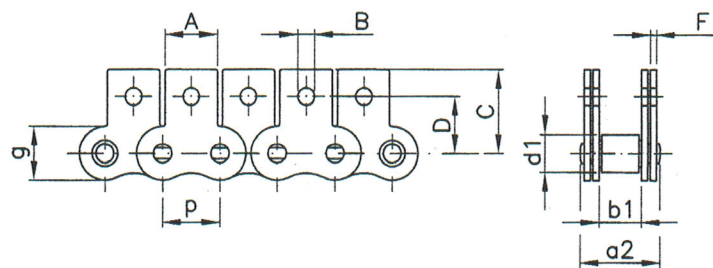


ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	F mm	F _B min. N	q kg/m ≈
	mm	inch											
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	8,0	3,5	13,5	9,5	1,03	9100	0,61
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	9,5	4,3	18,4	14,1	1,40	18200	1,01
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	14,1	5,2	24,7	15,9	1,63	22700	1,32
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	15,8	5,6	26,6	17,9	1,80	29500	1,66
16B-1	25,4	1"	17,02	15,88	36,1	21,08	19,0	6,8	35,0	26,0	3,00	58000	4,27

M2/02

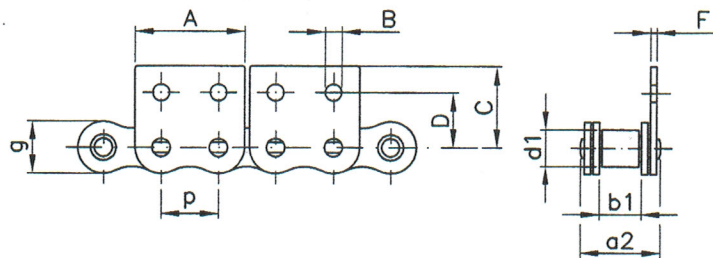

ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	F mm	F _B min. N	q kg/m ≈
	mm	inch											
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	17,6	3,2	13,5	9,5	1,03	9100	0,51
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	23,2	4,3	18,4	14,1	1,40	18200	0,85
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	29,3	5,2	24,7	15,9	1,63	22700	1,13
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	33,0	5,6	31,3	17,9	1,80	29500	1,45
16B-1	25,4	1"	17,02	15,88	36,1	21,08	45,9	6,8	36,6	26,0	3,00	58000	3,48


MK2/02

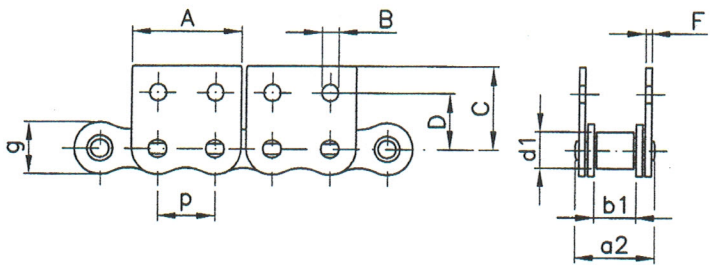

ISO Nr.	p		b ₁ mm min.	d ₁ mm max.	a ₂ mm max.	g mm max.	A mm	B mm	C mm max.	D mm	F mm	F _B min. N	q kg/m ≈
	mm	inch											
06B-1	9,525	3/8"	5,72	6,35	13,5	8,26	17,6	3,2	13,5	9,5	1,03	9100	0,61
08B-1	12,7	1/2"	7,75	8,51	17,0	11,81	23,2	4,3	18,4	14,1	1,40	18200	1,01
10B-1	15,875	5/8"	9,65	10,16	19,6	14,73	29,3	5,2	24,7	15,9	1,63	22700	1,32
12B-1	19,05	3/4"	11,68	12,07	22,7	16,13	33,0	5,6	31,3	17,9	1,80	29500	1,66
16B-1	25,4	1"	17,02	15,88	36,1	21,08	45,9	6,8	36,6	26,0	3,00	58000	4,27

CATENA A RULLI IN ACCIAIO "INOX AISI 304"

ROLLER CHAINS IN 304 STAINLESS STEEL

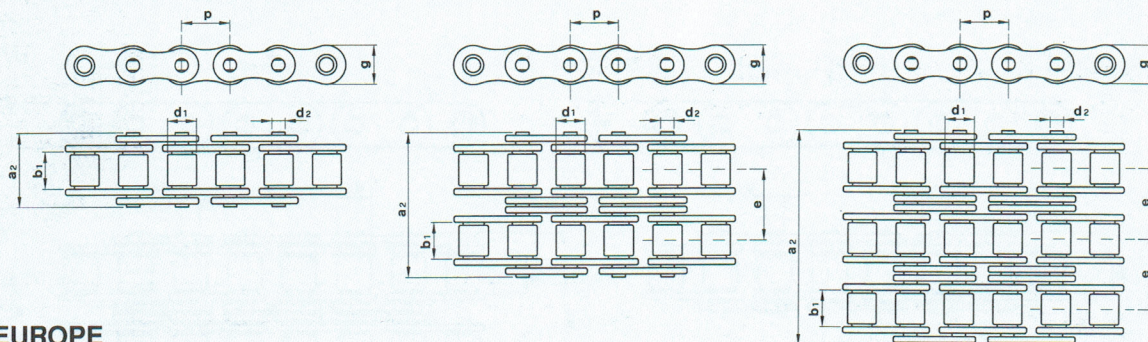

MADE IN EUROPE

CATENA A RULLI SEMPLICE - DIN 8187 "AISI 304"

ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	F _B min. N	q kg/m ≈
	mm	inch							
06B-1	9,525	3/8"	5,72	3,28	6,35	13,5	8,26	6.000	0,41
08B-1	12,7	1/2"	7,75	4,45	8,51	17,0	11,81	10.000	0,70
10B-1	15,875	5/8"	9,65	5,08	10,16	19,6	14,73	13.000	0,95
12B-1	19,05	3/4"	11,68	5,72	12,07	22,7	16,13	17.000	1,25
16B-1	25,4	1"	17,02	8,28	15,88	36,1	21,08	37.000	2,70

CATENA A RULLI DOPPIA - DIN 8187 "AISI 304"

ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	F _B min. N	q kg/m ≈
	mm	inch								
06B-2	9,525	3/8"	5,72	3,28	6,35	23,8	8,26	10,24	10.000	0,78
08B-2	12,7	1/2"	7,75	4,45	8,51	31,0	11,81	13,92	20.000	1,35
10B-2	15,875	5/8"	9,65	5,08	10,16	36,2	14,73	16,59	24.000	1,85
12B-2	19,05	3/4"	11,68	5,72	12,07	42,2	16,13	19,46	31.000	2,50
16B-2	25,4	1"	17,02	8,28	15,88	68,0	21,08	31,88	68.000	5,40

CATENA A RULLI TRIPLA - DIN 8187 "AISI 304"

ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	F _B min. N	q kg/m ≈
	mm	inch								
06B-3	9,525	3/8"	5,72	3,28	6,35	34,0	8,26	10,24	14.000	1,2
08B-3	12,7	1/2"	7,75	4,45	8,51	44,9	11,81	13,92	30.000	2,0
10B-3	15,875	5/8"	9,65	5,08	10,16	52,8	14,73	16,59	38.000	2,8
12B-3	19,05	3/4"	11,68	5,72	12,07	61,7	16,13	19,46	52.000	3,8
16B-3	25,4	1"	17,02	8,28	15,88	99,9	21,08	31,88	99.000	8,0

CATENA A RULLI SEMPLICI - DIN 8188 "ANSI" ASA "AISI 304"

ANSI Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	F _B min. N	q kg/m ≈
	mm	inch							
50-1	15,875	5/8"	9,53	5,08	10,16	21,8	15,09	14.000	1,01
60-1	19,05	3/4"	12,70	5,94	11,91	26,9	18,08	19.000	1,47
80-1	25,4	1"	15,88	7,92	15,88	33,5	21,13	27.000	2,57